


Stereo Microscope	I-22	I-65	I-68	
				
Category	Affordable solution with solid construction	Ideal for inspection, assembly, and measurements	High resolution optics with comfortable observation	
Zoom Ratio	6.5:1	6.5:1	6.8:1	
Zooming Range 10x Eyepiece	7 – 45x	7 - 45x	7 - 47x	
Eyepiece	SWF10x / 20 mm	SWF10x / 22 mm	SWF10x / 23 mm	
Distance Adjustment	2" - 3" (55 - 75 mm)	2" - 3" (50 - 75 mm)	2" - 3" (50 - 75 mm)	
Viewing Head	Eyepiece inclination: 45°	Eyepiece inclination: 40°	Eyepiece inclination: 35°	
Working Distance 1X Lens	4.25" (108 mm)	4.25" (108 mm)	4.25" (108 mm)	
Working Distance 0.5X Lens	6" (156 mm)	7.25" (184 mm)	7.25" (184 mm)	
Included accessories	* 0.5 mm lens * IM-A32 arm * 144 LED Ring Light * Focus block FM-32-76	* 0.5 mm lens * IM-A32 arm * 144 LED Ring Light * Focus block FM-32-76	* 0.5 mm lens * IM-A32 arm * 144 LED Ring Light * Focus block FM-32-76	

Optional Accessories

Model	IM-32A
Hanging Bar	1-1/4" (32 MM Dia.)
Horizontal Extension	33" (838 MM)
Vertical Extension	23" (590 MM)
Movement	Gas Spring
Construction	Aluminum & Steel
Table Clamp Clearance	2" (54 MM)
Stow Area	4"x17"
IM-32 Articulating Arm	
IM-B32 Ball Bearing Arm	
FM 32-84 & FM 32-76 Focus Block	
LED Ring	
IM-32BD Bolt Down Base mount	
IM-32B Table Stand	



LED Ring

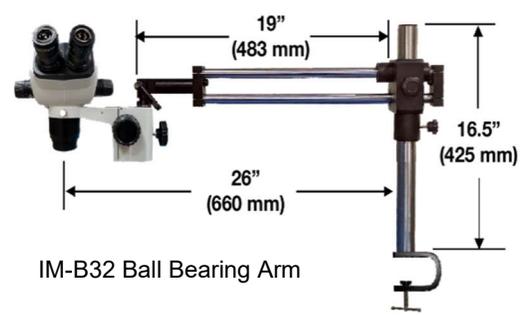

IM-32B Base Stand



IM-32BD Bolt Down